


Perforate Backlight Pan – Spec Sheet

Andalusia's **Perforate Backlighting Pan** is an engineered lighting assembly designed to integrate seamlessly with Andalusia perforated metal panels for wall and ceiling applications.

Key System Components

- Ceiling pan lays-in to standard 15/16" T-grid
- Wall pan mounts directly to wall
- Integrated LED arrays are factory-mounted to pan
- Acrylic diffuser is installed on the Perforate panel to soften and evenly distribute the LED source
- Perforate panel mechanically attaches to the backlight pan using torsion springs for ceiling applications, easing installation and service access
- Lambertian source distribution (IES files available)

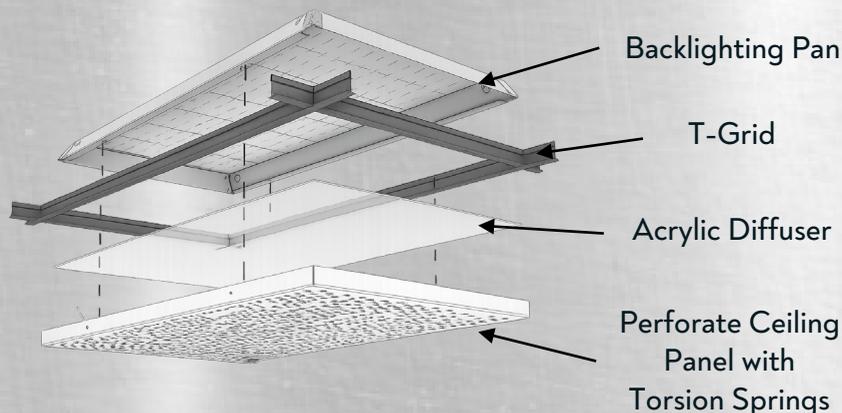

Andalusia Design
andalusia.design
hello@andalusia.design



Backlighting Pan Parameters

* Based on 2'x4' form factor

Product Code	LPERF-XXXXXX
Total Lumens (source)	2000 lm
Power Consumption	24W
Delivered Lumens	Varies
Efficacy (source)	~ 106 lm / W
CRI	80 (90 available)
CCT	2700K, 3000K, 3500K, 4000K
UL Rating	Driver UL Listed
Voltage	24V DC, Class 2
Power Type	Constant Voltage
Dimming Method	0-10V
Dimming Low-End	1%
Plenum Rated Wire	Standard Plenum Rated Wire
Driver Location	Remote
Form Factor	Lay-in; wall-mount
Compatibility	Perforate System
Pan Size	Nominal 24"x48"
Pan Material	Formed Metal
Diffuser	1/8" acrylic