

# PARAMETRIC COFFERED TILE SYSTEM™

Turn a traditional grid into a design statement!

Andalusia's Coffered Tile combines a painted wood frame with a PET felt infill to add depth, color, and acoustic performance


## PARAMETRIC COFFERED TILE SYSTEM

Andalusia's Coffered Tile system reimagines the traditional ceiling tile by combining a PET felt acoustic surface with stained wood or painted MDF edges that extend below the grid.

2'x2' modular tiles are available in multiple drop depths and finishes, bringing warmth, sound absorption, and dimension to standard T-grid ceilings.

### KEY FEATURES

- Precision-crafted 3/4" wood edges
- PET acoustic felt insert
- Standard drop depths: 2", 3", 4", 5" or 6"
- PET felt available in 20+ standard colors
- Custom drop depths and finishes
- 2'x2' tiles compatible with 15/16" T-grids
- NRC Rating: 0.40 – 0.65
- Drop-in installation
- Leverage Andalusia's design services to customize your system configuration

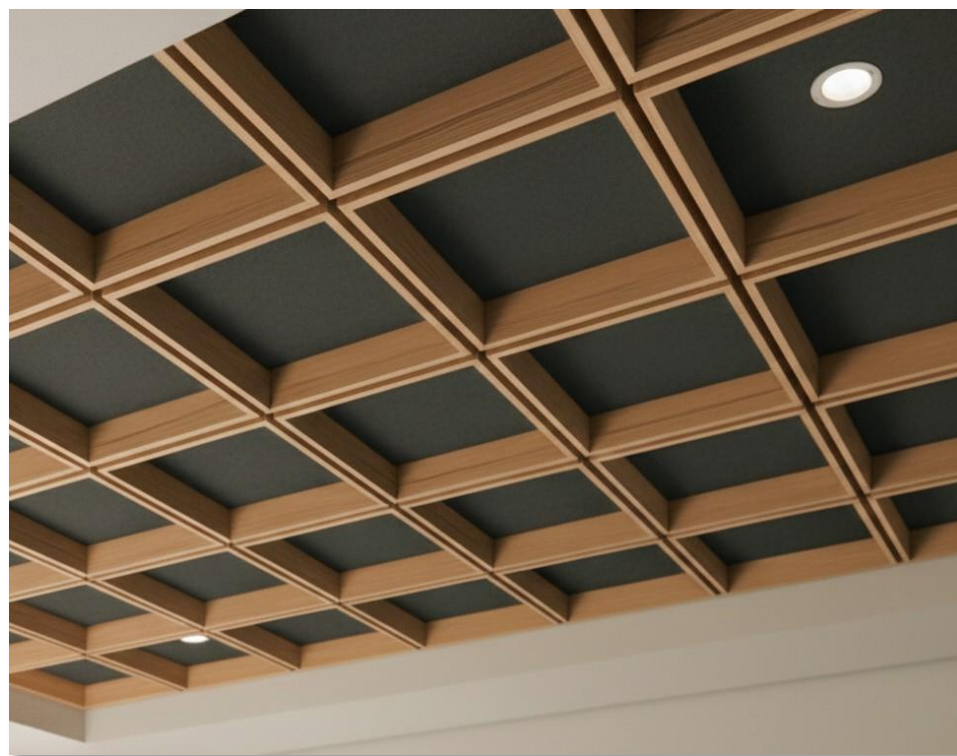


## COFFERED TILE CONSTRUCTION

All Andalusia products are designed for high quality, premium aesthetics and ease-of-install.

The Coffered Tile easily lays in to any grid system. Metal flange top ensures level grid lay-in and more durable tile construction vis-à-vis using all PET felt. An open center area results in lighter weight and strong acoustic performance.




The top surface can be easily removed to provide good serviceability.

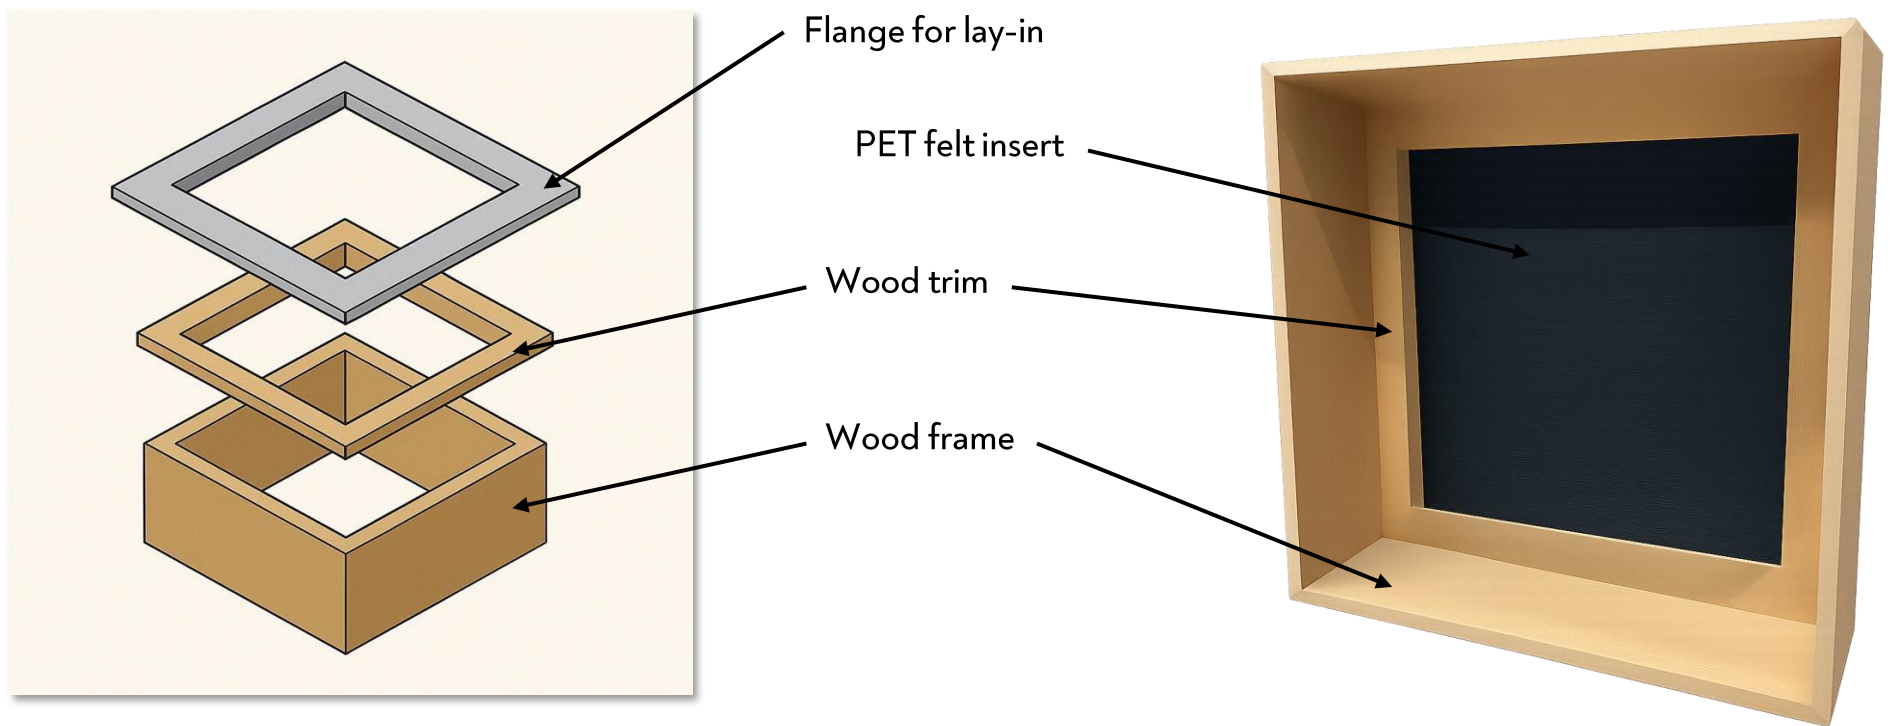

## WOOD FRAME COLOR AND FINISH OPTIONS

Andalusia's wood components are available in architectural-grade MDF or multi-ply hardwood plywood. Both options are available in Class A fire rated and can be clear coated, stained, or painted. Standard thickness is 3/4". Custom finishes and species available upon request.

### Standard Plywood Stains

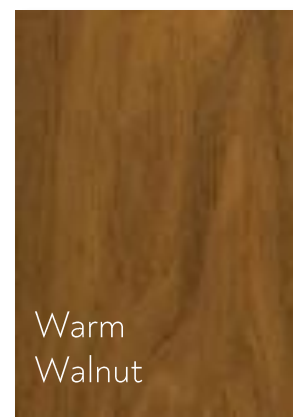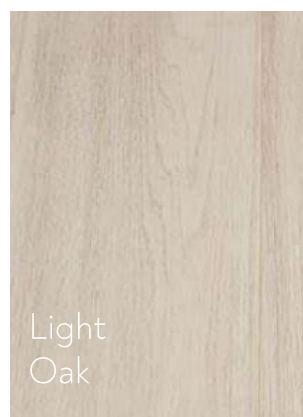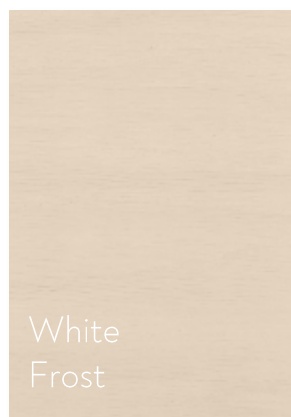

# ACOUSTIC LAY-IN COLOR OPTIONS

Material: Compressed PET fiber acoustic felt

Recycled Content: Typically produced using recycled PET plastics Standard Thickness: 9mm

Panel Sizes: Varies depending on system integration


Acoustic Performance: Effective sound absorption when used in an application

Fire Performance: \*Denotes ASTM E84 Class A standard; others are not fire rated but can be Class A with minimum volumes; custom colors available



## ACOUSTIC TEST DATA

Work with Andalusia's acoustic experts to evaluate the impact of the tiles in your space.

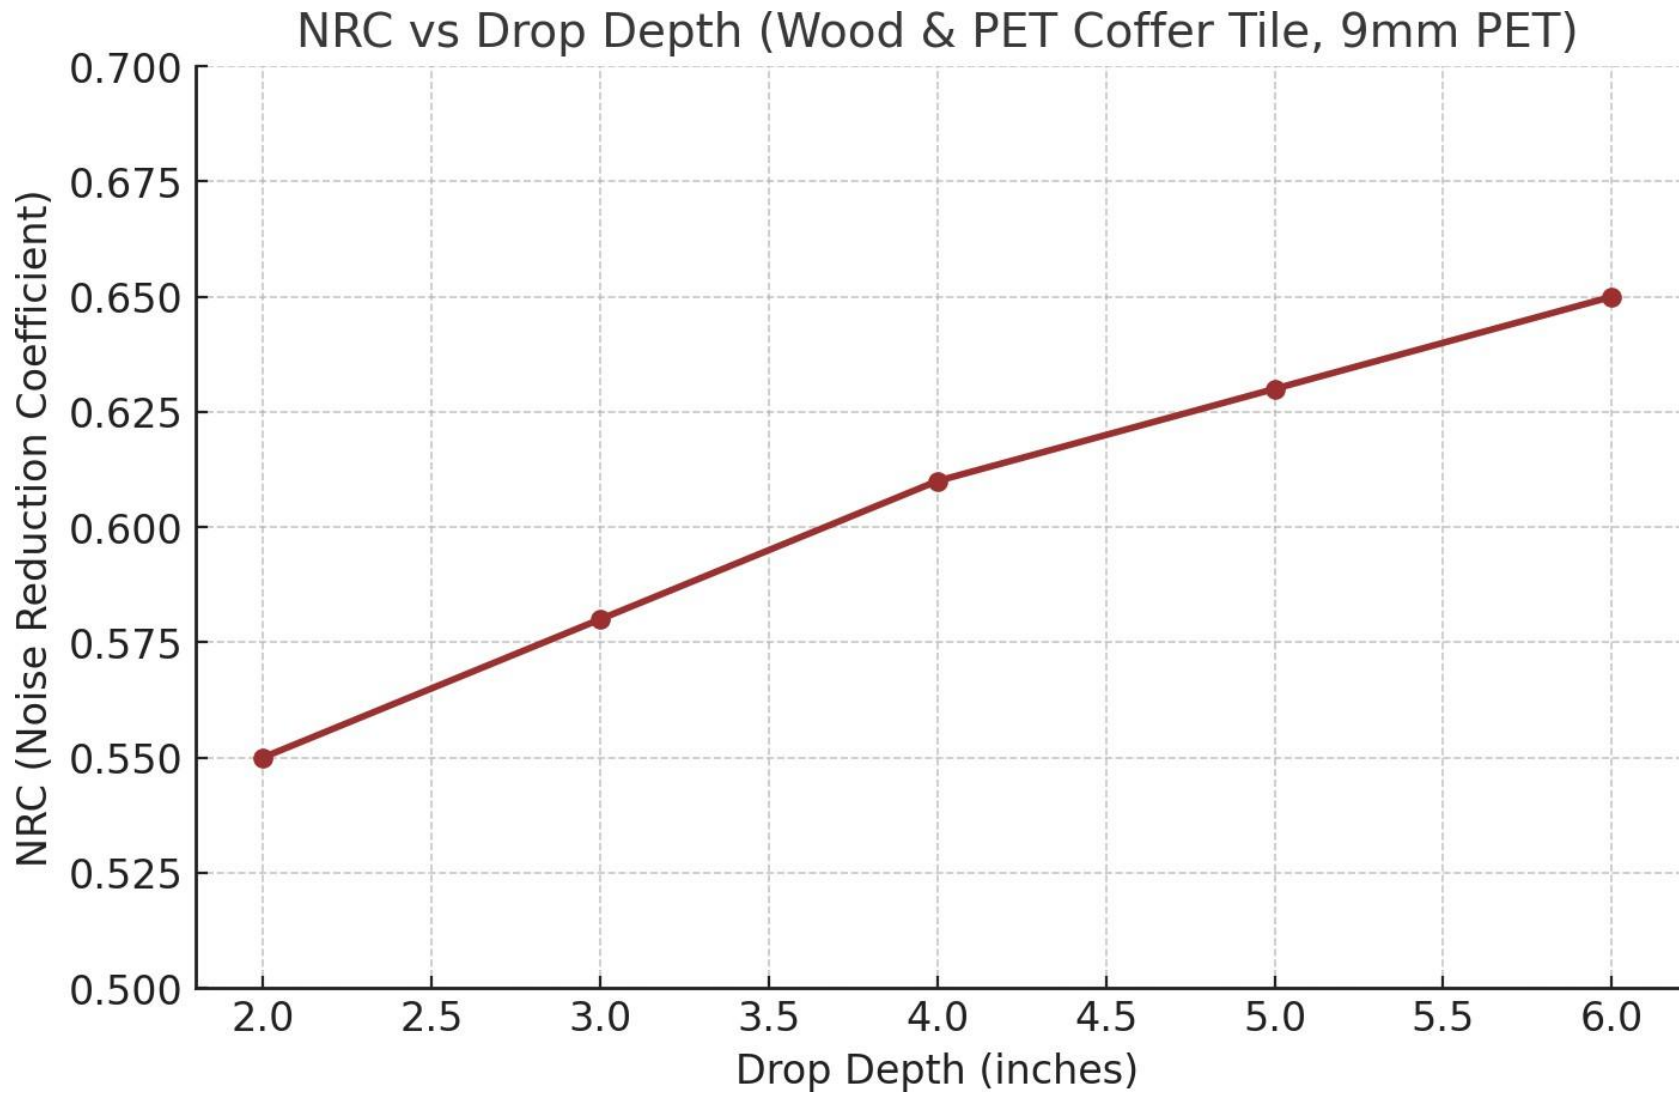

## PUT ON YOUR PROJECT

CONTACT ANDALUSIA at [hello@andalusia.design](mailto:hello@andalusia.design) or your Local Rep to make the specification and order process as simple as possible!

### SPECIFICATION CHECKLIST

Product: Andalusia 2'x2' Coffered Tile

Frame Material: Architectural MDF

Insert Material: Architectural 9mm PET Felt

Frame Finish (Pick One):

Stained Veneer

Painted

Color Code: \_\_\_\_\_

Custom Color or Stain: \_\_\_\_\_

Frame Height (2" to 6"): \_\_\_\_\_

Insert Color:

Color Code: \_\_\_\_\_

Custom Color: \_\_\_\_\_

Insert Depth:

Flush to T-Grid

Above Frame (1" to 5"): \_\_\_\_\_



ANDALUSIA