


Perforate Backlight Wall Pan – Spec Sheet

Andalusia's **Perforate Backlighting Pan** is an engineered lighting assembly designed to integrate seamlessly with Andalusia perforated metal panels for wall and ceiling applications.

Key System Components

- Wall pans are sized to match Perforate panel sizes
- Wall pans fasten directly to wall framing or blocking
- Integrated LED arrays are factory-mounted to pan
- Light diffuser is installed on the Perforate panel to soften and evenly distribute the LED source
- Lambertian source distribution (IES files available)

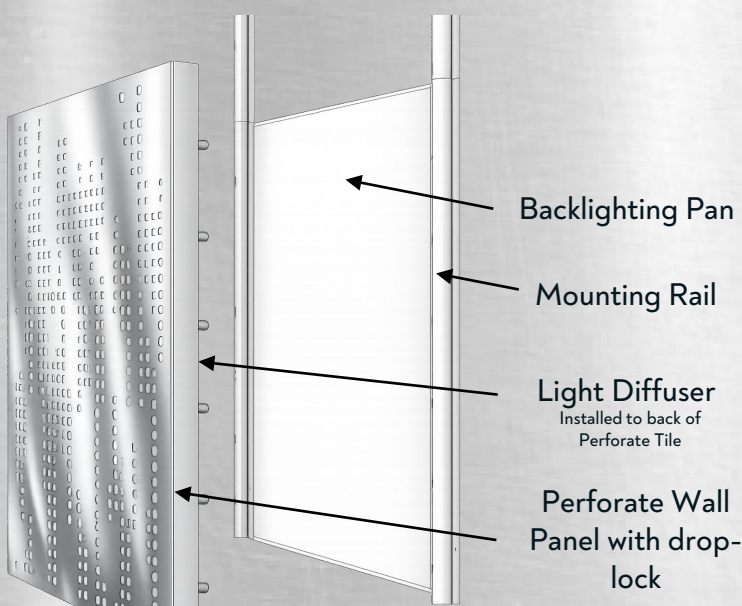

Andalusia Design
andalusia.design
hello@andalusia.design

Backlighting Pan Parameters

Product Code	LPERF-XXXXXX
Total Lumens (source)	260 lm/sqft
Power Consumption	2.6W/sqft
Delivered Lumens	Varies
Efficacy (source)	~ 100 lm / W
CRI	90+ R9>50
CCT	2700K, 3000K, 3500K, 4000K
UL Rating	Driver UL Listed
Voltage	24V DC, Class 2
Power Type	Constant Voltage
Dimming Method	0-10V
Dimming Low-End	1%
Plenum Rated Wire	Standard Plenum Rated Wire
Driver Location	Remote
Form Factor	wall-mount
Compatibility	Perforate System
Pan Size	Varies based on wall
Pan Material	Formed Metal
Diffuser	1/8" integrated